

RED PARACHUTE SIGNAL ROCKET

datasheet

The Comet Red Parachute Signal Rocket conforms to SOLAS 1974 as amended. Designed to withstand exceptional environmental exposure and to perform reliably even after immersion in water, the pull wire ignitor and improved grip provides easy handling. Ejecting a red flare suspended on a parachute at 300m (1000ft), burning for 40 seconds at 30,000 candela.



✓ APPLICATION


A day or night long-range distress signal. 12 may be carried on ships bridge and there is a requirement for 4 in ships lifeboats and liferafts. Also suitable for use in other commercial and recreational boats.

✓ STORAGE

Ideally, should be stored in the robust, specially designed Polybottle, or in a dry, easily accessed location at ambient temperature.

✓ OPERATION

1. Hold signal firmly by ribbed handle. Unscrew RED bottom cap. Do not point at people or property.
2. Hold rocket vertically above head pointing away from body.
3. Ensure hands remain clear of top. To fire - pull red ball sharply down.

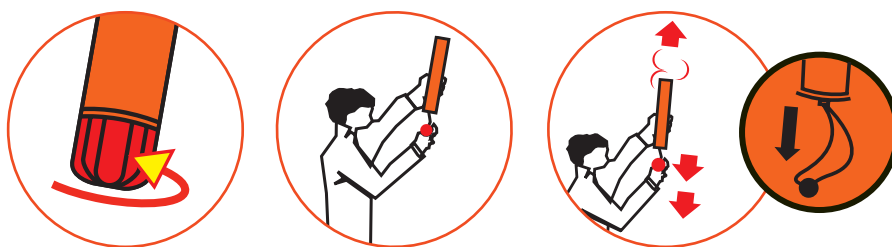

WARNING:

- Ejects rocket projectile - do not point at people or property
- Do not fire in a confined space
- Keep out of reach of children
- Only for emergency use at sea
- If damaged or dented do not use
- Do not dismantle
- Keep away from source of heat
- Do not use after expiry date



DISPOSAL:

- Pyrotechnics must be treated as hazardous items and must be disposed of responsibly in accordance with local regulations. For help and advice, visit our website www.comet-marine.com

Art No.

9163100



Safety of life at Sea (SOLAS)



Marine Equipment Directive (MED)



RED PARACHUTE SIGNAL ROCKET


Authorised Dealer

Drew Marine Signal & Safety UK Ltd
Langstone Technology Park
Langstone Road
Havant
Hampshire
PO9 1SA
United Kingdom

Tel: +44 (0)2392 415700
Fax: +44 (0)2392 415701
Email: info@signalandsafety.com



Drew Marine Signal & Safety

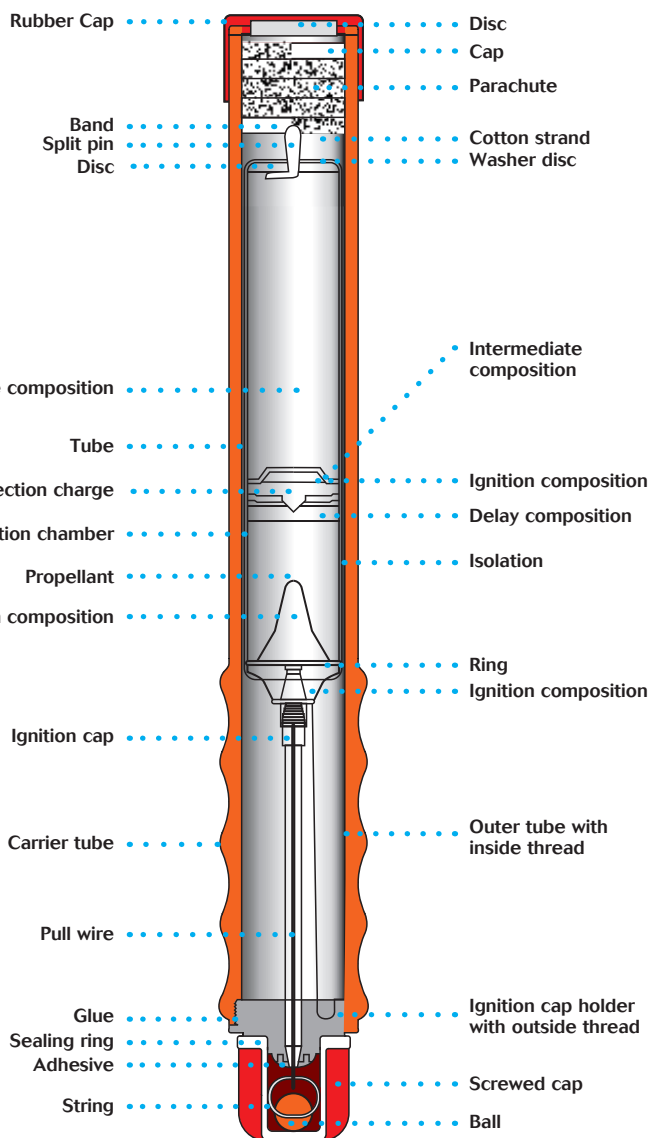

techspec

✓ SPECIFICATIONS:

● Length:	287 mm (11.3 ins)	● Light intensity:	30,000 candela
● Diameter at handle:	38 mm (1.5 ins)	● Burning time:	40 seconds
● Diameter:	32 mm (1.25 ins)	● Colour of light:	red
● Weight Max:	235g (8.23 oz)	● Ignition:	pull-wire ignitor
● NEC Max:	92g (3.25 oz)	● Altitude:	300 m (985 ft)

✓ APPROVALS

Conforms to SOLAS 1974 as amended, IMO Resolution 96/98/EC. MED - BGV 425.005 : BAM-P2-0059, 0589-P2-0046, USCG and other major maritime authorities world wide.

✓ PACKING & TRANSPORT INFORMATION

- 56 rockets in 2 metal tins in a fibreboard box
- Gross weight 15.76Kg (34.75 lbs) ● Net weight 13.16Kg (29.00 lbs)
- Measurements of fibreboard box: 48 x 27 x 37 cm (18.9 x 10.63 x 14.57 in)
- Net Explosive Content per box Max: 5.512 Kgs (12.15 lbs)
- Hazard Class 1.4G ● UN 0505
- Proper Shipping Name: Signals, Distress, Ship
- Other Information: Cargo Aircraft Only



www.comet-marine.com

Issue:4 01/14